








# Dynapac F1000W (T4)


## Highway pavers





### Technical data

 <b>Masses</b>	
Tractor weight	33,400 lbs
 <b>Dimensions</b>	
Basic width	10 ft
Working width, max.	28 ft
Working width, minimum (Cut Off Shoe)	8 ft
 <b>Capacity</b>	
Maximum paving thickness	12 in
Theoretical placement capacity	1,600 t/h
Practical placement capacity	900 t/h
 <b>Material hopper</b>	
Capacity	235 cu. ft.
Dumping height (center/outside)	15.98 in /27 in
Hopper width, internal	127 in
 <b>Propulsion</b>	
Paving speed	0-128 fpm
Maximum paving speed	285 fpm
Transport speed	12 mph
 <b>Operation stations</b>	
Control consoles	Dual Swing out
Dashboard	Ergonomic dashboard with Multifunction display on each console

 <b>Engine</b>	
Manufacturer/Model	Cummins QSB 6.7-225
Type	6 cylinder water cooled diesel engine with hydraulically driven fan
Rated power, SAE J1995	225 hp @ 2,300 rpm
Electrical system	24 V
Generator (tractor mounted)	34 kW, 60 Hz, Drive: Hydraulic
Fuel tank capacity	98 gal
Emissions according to	T4F

 <b>Undercarriage</b>	
Drive wheels	2x Hydrostatic Drives
Front wheels (Qty x W x D)	2 x 16 x 22 in
Tire size	18.00R25
Turning radius (inside)	4.92 ft

 <b>Conveyor</b>	
Conveyor type	Dual bar feeder
Conveyor width	2 x 27 in
Conveyor control	Two independent conveyor half's with infinitely variable speed. Both half's can be controlled separately. Conveyor control independent of Augers by Ultrasonic sensors.

 <b>Auger</b>	
Auger diameter	17 in
Auger control	Two reversible augers with proportional speed control. Left and right augers to be controlled separately by Ultrasonic sensors.

Find us locally at [www.dynapac.us](http://www.dynapac.us)


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

# Dynapac F1000W (T4)


## Highway pavers



### Technical data

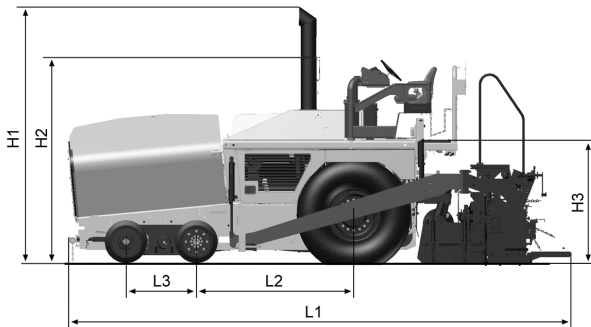

Dimensions	
A. Wheelbase	95 in
B1. Width, max.	129 in
B2. Width, standard	120 in
H1. Height, max.	132 in
H2. Height, with folded exhaust	106 in
H3. Height	63 in
L1. Length	262 in
L2. Length, wheelbase	80 in
L3. Length, wheel module	37 in



Suitable screeds					
Model	Basic width	Working width, hydraulic extendable	Working width, max.	Compacting elements	Heating system
Carlson EZ-R2-10	10 ft	19.60 ft	26 ft	Vibration	Electrical
Carlson EZIII	10 ft	17 ft	24 ft	Vibration	Electrical
Carlson EZIV-1019	10 ft	19 ft	25 ft	Vibration	Electrical

Find us locally at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.