


Dynapac F1200CS


Compact pavers





Technical data


 Masses	
Paver weight (incl. standard screed)	12,800 lbs


 Dimensions	
Basic width	3.9 ft
Working width, max.	10.2 ft
Working width, hydraulic extendable	7.9 ft
Working width, minimum (Cut Off Shoe)	0 ft
Front ramp angle	15,5°


 Capacity	
Paving thickness (max/min)	7.9 /-5.9 in
Theoretical placement capacity	300 t/h


 Material hopper	
Capacity	81 cu. ft. (11,000 lbs)
Dumping height, center	22 in
Hopper width, internal	111 in


 Propulsion	
Paving speed	up to 90 ft/min
Transport speed	180 fpm

 Operation stations	
Control consoles	Slideable left/right
Operator seat	Adjustable, fluid-cushioned comfort seat
Platform	Extensible platform

 Engine	
Manufacturer/Model	Deutz TD2.9 L4
Emissions according to	US T4f
Rated power	72 hp @ 2.200 rpm
Electrical system	2 x 12V, 72 Ah
Fuel tank capacity	22 gal

 Undercarriage	
Crawler length	54.7 in
Crawler width	8.1 in
Final drive	Direct drive over transmissions

 Conveyor	
Conveyor type	Splitted conveyor drive with center cover
Conveyor width	25.6 in
Conveyor control	Automatic with limit switches

 Auger	
Auger diameter	12.6 in
Auger control	Automatic with ultrasonic sensor
Auger height adjustment	Infinitely variable by 150mm

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



dynapac_f1200cs_us-20180208.213231.pdf 2018-02-08 21:32

Dynapac F1200CS

Compact pavers



Technical data

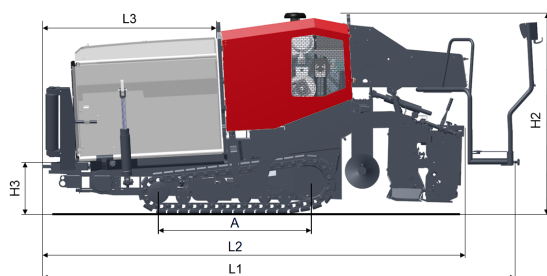

Dimensions

A. Axle track	54.7 in
B1. Width, max.	111.4 in
B2. Width, standard	3.9 ft
B3. Width, center of tracks	37.0 in
C1. Track width	8.1 in
H2. Height, transport	74.8 in
H3. Height	19.3 in
L1. Length, total	14.3 ft
L2. Length, transport	12.7 ft
L3. Length, hopper	51.6 in



Standard equipment

2 front & 2 rear lights, Conventional electrics, Conveyor reversible (splitted), Dashboard with toggle switches, Eco Mode, Extendable steps operator platform, Hopper hydraulic separate control, Mechanical auger height adjustm., Mechanical conveyor limit switches, Ultrasonic sensors auger



Optional equipment

Back-up alarm, Cut off shoes (9.8 in or 13.8 in), Emulsion spray equipment (Gloria), Emulsion spray equipment, pump, hose dispenser, Fire extinguisher, First aid kit, Foldable material guide plates, LED lights, Light for auger compartment, Material laying kit (left or right), Panolin bio hydraulic oil, Remote steering device, Rotating flashing beacon, Side shield easy adjust, Special painting, Working widths

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_f1200cs_us-20180208.213231.pdf 2018-02-08 21:32