

Dynapac FC1400C

Commercial pavers



Technical data

Masses	
Mass (tractor)	4.2 t
Mass (incl. standard screed)	5.7 t

Dimensions	
Basic width	2.60 m
Working width, max.	4.30 m
Working width, hydraulic extendable	4.30 m
Working width, minimum (with reducing shoe)	0.30 m
Front ramp angle	11°

Capacity	
Theoretical placement capacity	450 m ³ /h
Paving thickness (max/min)	150 mm / 0 mm

Material hopper	
Capacity	5.9 t
Dumping height, center	530 mm
Hopper width, internal	3050 mm

Traction	
Paving speed	2,5 km/h
Transport speed	5.0 km/h

Engine	
Manufacturer/Model	Kubota V3600
Emissions according to	EPA T4i/EU3B
Rated power, SAE J1995	50 kW (67 hp) @ 2600 rpm
Electrical system	12V
Fuel tank capacity	50 l
Engine alternator capacity	90 Amps

Undercarriage	
Type	Steel track with poly pad
Crawler length	1450 mm
Crawler width	305 mm
Final drive	Hydrostatic with gear reducer

Conveyor	
Conveyor type	Dual slat conveyor
Conveyor width	610 mm
Conveyor control	On /Off

Auger	
Auger diameter	230 mm
Auger control	Automatically with ultrasonic sensor
Extension auger	9 inches, mounted on screed extensions

Find us locally at www.dynapac.com



We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac FC1400C

Commercial pavers



Technical data

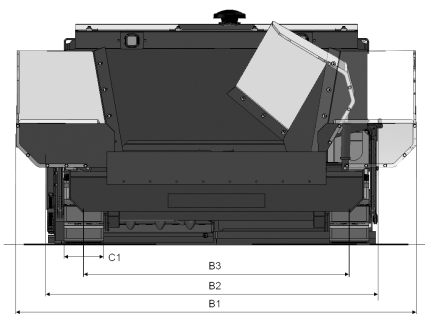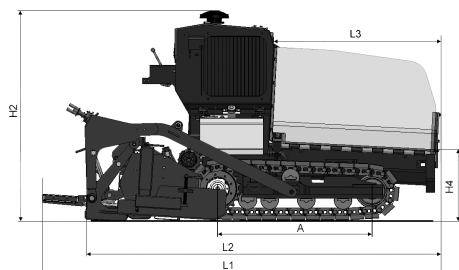

Dimensions	
A. Axle track	1397 mm
B1. Width, max.	3175 mm
B2. Width, standard	2590 mm
B3. Width, center of tracks	2030 mm
C1. Track width	305 mm
H2. Height, transport	1630 mm
H4. Dumping height	535 mm
L1. Length, total	3450 mm
L2. Length, transport	3450 mm
L3. Length, hopper	1520 mm



Standard equipment

LED Work Lights, Backup Alarm & Rotating Beacon, Reversible auger and conveyor, Rebuildable wear resistance conveyor floor plates, Segmented High Wear Augers, FleetLink Telematics, Ultrasonic sensors auger, Wash down spray system, Dual operator console with conventional electrics



Optional equipment

Levelling System, Averaging Ski beam, Cut-Off plates, Truck Hitch, Umbrella

Suitable screeds					
Model	Basic width	Working width, hydraulic extendable	Working width, max.	Compacting elements	Heating system
Dynapac VF0814C	2.45 m	4.30 m	4.30 m	Vibration	Propane (LPG)

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.