

3412 HT P

Compactor with padfoot drum

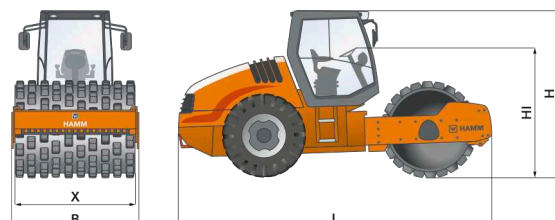
Compactors Series 3000 / Series H180








HIGHLIGHTS 3000

- > 3-point articulation for outstanding traction and off-road mobility
- > Simple, intuitive and language-neutral operation
- > Ergonomic driver platform with rotatable seat operating unit, adjustable driver's seat and tilting steering column
- > Excellent view of the machine and the construction site
- > Electronic machine management Hammtronic

| Machine dimensions | | |
|---------------------------|----|------|
| Total length (L) | mm | 5705 |
| Width (B) | mm | 2250 |
| Total height (H) | mm | 3010 |
| Drum width (X) | mm | 2140 |
| Height loading, min. (HI) | mm | 2325 |



EU Stage
IIIA / EPA
Tier 3

| TECHNICAL DATA | | Unit | 3412 HT P |
|--|------------------------------------|------|----------------------------|
|  | Weights | | |
| | Operating weight with cab | kg | 12300 |
| | Operating weight with ROPS | kg | 12080 |
| | Operating weight, max. | kg | 13830 |
| | Axle load, front/rear | kg | 6805/5495 |
|  | Machine dimensions | | |
| | Total length | mm | 5705 |
| | Total height with cab | mm | 3010 |
| | Height loading, min. | mm | 2325 |
| | Wheel base | mm | 3015 |
| | Total width with cab | mm | 2250 |
| | Ground clearance, centre | mm | 375 |
| | Turning radius, inside | mm | 3690 |
| | Angle of driving slope, front/rear | ° | 35/34 |
|  | Drum dimensions | | |
| | Drum width, front | mm | 2140 |
| | Drum diameter, front | mm | 1684 |
| | Drum thickness, front | mm | 20 |
| | Drum type, front | | Padfoot |
| | Height of the padfeet | mm | 100 |
| | Padfeet, number | | 140 |
|  | Wheel dimensions | | |
| | Size of tyres, rear | | TR 23.1-26 12 PR |
|  | Diesel engine | | |
| | Manufacturer | | DEUTZ |
| | Version | | TCD 2012 L04 2V |
| | Number of cylinders | | 4 |
| | Power rat. ISO 14396, kW/PS/rpm | | 100,0/136,0/2300 |
| | Power rating SAE J1349, kW/HP/rpm | | 100,0/134,0/2300 |
| | Emission standard | | EU Stage IIIA / EPA Tier 3 |
|  | Drive | | |
| | Speed, infinitely variable | km/h | 0 - 14,0 |
| | Regulation, infinitely variable | | Hammtronic |
| | Climbing ability, vibration on/off | % | 65/70 |
|  | Vibration | | |
| | Vibration frequency, front, I/II | Hz | 30/40 |
| | Amplitude, front, I/II | mm | 1,90/0,90 |
| | Centrifugal force, front, I/II | kN | 256/215 |
|  | Steering | | |
| | Oscillation angle +/- | ° | 10 |
| | Steering, type | | Articulated steering |
|  | Tank capacity/Fill capacity | | |
| | Fuel tank, capacity | L | 290 |
|  | Sound level | | |
| | Acoustic power LW(A), sticker | | 106 |
| | Acoustic power LW(A), measured | | 103 |

EQUIPMENT

2 armrests, 3-point articulation, Adjustable scraper, Dashboard with displays, indicator lights and switches, Automatic traction control and anti-slip control, Battery isolation switch, Control console with steering column adjustment, Operator's platform with entry from both sides, Speed preselect, Hydrostatic steering, Vibration-isolated operator's platform, Stepless hydrostatic all-wheel drive, Dozer blade, Handrails on the operator's platform

OPTIONAL EQUIPMENT

Protective grille for lighting package, Rotating beacon, Hydraulic hose protection on front frame, Protective roof, Auxiliary heater, Version with additional fuel prefilter, ROPS cabin, Working lights, Back-up alarm (reversing), Frequency display, vibration, HAMM Compaction Meter (HCM), Radio, ROPS, rigid, Telematics interface

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

