

3414 HT VIO

Compactor with VIO-drum


Compactors Series 3000 / Series H180







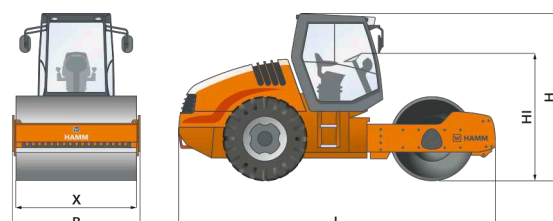


HIGHLIGHTS 3000

- > 3-point articulation for outstanding traction and off-road mobility
- > Simple, intuitive and language-neutral operation
- > Ergonomic driver platform with rotatable seat operating unit, adjustable driver's seat and tilting steering column
- > Electronic machine management Hammtronic
- > Compaction system VIO – vibration or oscillation

Machine dimensions		
Total length (L)	mm	5705
Width (B)	mm	2250
Total height (H)	mm	2990
Drum width (X)	mm	2140
Height loading, min. (Hl)	mm	2325



TIER 3
EU Stage IIIA / EPA Tier 3

TECHNICAL DATA		Unit	3414 HT VIO
	Weights		
	Operating weight with cab	kg	14010
	Operating weight with ROPS	kg	13790
	Operating weight, max.	kg	16830
	Axle load, front/rear	kg	7965/6045
	Static linear load, front	kg/cm	37,2
	Machine dimensions		
	Total length	mm	5705
	Total height with cab	mm	2990
	Height loading, min.	mm	2325
	Wheel base	mm	3015
	Total width with cab	mm	2250
	Ground clearance, centre	mm	375
	Turning radius, inside	mm	3690
	Angle of driving slope, front/rear	°	31/34
	Drum dimensions		
	Drum width, front	mm	2140
	Drum diameter, front	mm	1504
	Drum thickness, front	mm	30
	Drum type, front		smooth
	Wheel dimensions		
	Size of tyres, rear		AW 23.1-26 12 PR
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 2012 L04 2V
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		100,0/136,0/2300
	Power rating SAE J1349, kW/HP/rpm		100,0/134,0/2300
	Emission standard		EU Stage IIIA / EPA Tier 3
	Drive		
	Speed, infinitely variable	km/h	0 - 14,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	58/62
	Vibration		
	Vibration frequency	Hz	33
	Amplitude, vibration	mm	1,89
	Centrifugal force, vibr.	kN	279
	Oscillation		
	Oscillation force	kN	230
	Oscillation frequency	Hz	30
	Tangential amplitude, oscillation	mm	1,74
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	290
	Sound level		
	Acoustic power LW(A), sticker		108
	Acoustic power LW(A), measured		105

EQUIPMENT

2 armrests, 3-point articulation, Adjustable scraper, Dashboard with displays, indicator lights and switches, Automatic traction control and anti-slip control, Battery isolation switch, Control console with steering column adjustment, Operator's platform with entry from both sides, Speed preselect, Hydrostatic steering, Vibration-isolated operator's platform, Stepless hydrostatic all-wheel drive, Dozer blade, Handrails on the operator's platform

OPTIONAL EQUIPMENT

Protective grille for lighting package, Rotating beacon, Hydraulic hose protection on front frame, Protective roof, Padfoot shells, Auxiliary heater, Version with additional fuel prefilter, ROPS cabin, Working lights, Back-up alarm (reversing), Frequency display, vibration, HAMM Compaction Meter (HCM), Radio, ROPS, rigid, Telematics interface

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

