


Dynapac CC6200


Double drum vibratory rollers


Atlas Copco





Technical data


 Masses	
Max. operating mass	13,600 kg
Operating mass (incl. ROPS)	12,000 kg
Module mass (front/rear)	6,000/6,000 kg

 Traction	
Speed range (Dual/TC/AS)	0-12
Vertical oscillation	±7°
Theor. gradeability	38 %

 Compaction	
Centrifugal force (high/low amplitude)	166/106 kN
Nominal amplitude (high/low)	0.8/0.3 mm
Static linear load (front/rear)	28.2/28.2 kg/cm
Vibration frequency (high/low amplitude)	51/67 Hz
Water tank (l)	900/1150/1400

 Engine	
Manufacturer/Model	Cummins QSB 4.5 IIB/T4i
Type	Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995	119 kW (160 hp) @ 2,200 rpm
Fuel tank capacity	240 l

 Engine	
Manufacturer/Model	QSB 4.5 IIIA/T3
Type	Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995	113 kW (152 hp) @ 2,200 rpm

 Hydraulic system	
Driving	Axial piston pump with variable displacement. Axial piston motors (2) with variable displacement.
Vibration	Axial piston pumps (2) with variable displacement. Axial piston motors (2) with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in both drums.

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



rce_cc6200_en-20131204.085842.pdf 2013-12-04 08:58

Dynapac CC6200

Double drum vibratory rollers

Atlas Copco

Technical data

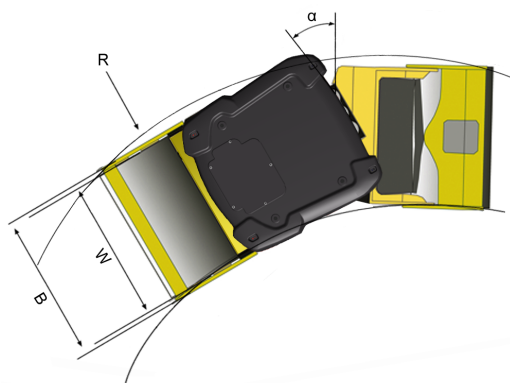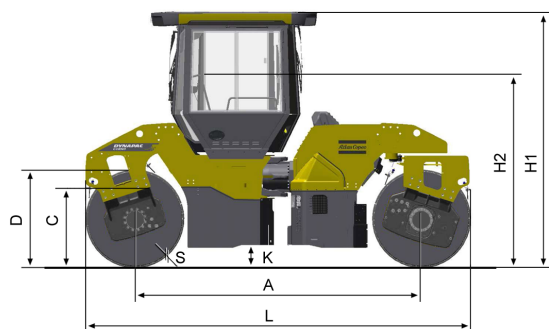

Dimensions	
A. Wheelbase	3,690 mm
B. Width	2,290 mm
C. Curb clearance	865 mm
D. Drum diameter	1,300 mm
H1. Height, with ROPS/cab	2,990 mm
H2. Height, w/o ROPS/cab	2,275 mm
K. Ground clearance	310 mm
L. Length	4,990 mm
R. Turning radius, outside	6,160 mm
S. Drum shell thickness	18 mm
W. Drum width	2,130 mm
α . Steering angle	$\pm 32^\circ$

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

rce_cc6200_en-20131204.085842.pdf 2013-12-04 08:58