


Dimensions

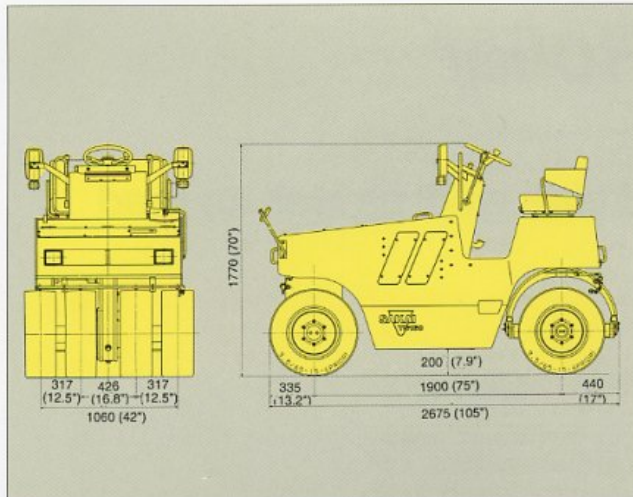

Feature

- ★ Travel speed is the highest in this class (0 ~ 15 km/h), permitting efficient works.
- ★ Wide tires with a wide overlap of 83 mm realize flat surface with fine texture.
- ★ Unique frame design permits a good view of ground to compact up to the very edge of curbs.
- ★ Forward-reverse lever and steering wheel are light in operation thanks to all-hydraulic system.
- ★ High level of safety is assured by brake system with hydrostatic brake combined with highly reliable negative brake, gear type final drives and neutral start mechanism.
- ★ Maintenance is easy thanks to monitor display, spray nozzles removable by one touch and closed gear drive.
- ★ Low-noise bonnet and wide bench seat offer a good riding comfort.
- ★ Equipped with a liquid tank for splaying a liquid other than a light oil to prevent pick-up.

Specifications

WEIGHTS	
Gross weight	Approx. 2,900 kg (6,395 lbs)
Load on front axle	" 1,700 kg (3,750 lbs)
Load on rear axle	" 1,200 kg (2,645 lbs)
Empty weight	" 2,715 kg (5,985 lbs)
Load on front axle	" 1,600 kg (3,525 lbs)
Load on rear axle	" 1,115 kg (2,460 lbs)
DIMENSIONS	
Overall length	Approx. 2,675 mm (105")
Overall width	" 1,300 mm (51")
Overall height	" 1,770 mm (70")
Wheelbase	" 1,900 mm (75")
Rolling width	" 1,300 mm (51")
Ground clearance	" 200 mm (7.9")
SPEEDS (Forward & Reverse)	0 ~ 15.0 km/h (0 ~ 9.3 mile/h)
MINIMUM TURNING RADIUS (Outer)	3.9 m (154")
GRADABILITY	47% (25°)
ENGINE	
Model	KUBOTA "D1105-K2A" Diesel Engine
Type	Water-cooled, 4-cycle
Output	14.6 kW (19.6 HP) / 2,300 min ⁻¹
Battery	12V 80Ah × 1pcs
POWER LINE	
Transmission type	Hydrostatic transmission
Final drive	Spur gear
BRAKE SYSTEM	
Service brake	Hydrostatic and mechanical, multi-disc wet type
Parking brake	Mechanical, multi-disc wet type
STEERING SYSTEM	
	Hydraulic type
WHEELS	
Front wheels / Rear wheels	4, Drive / 3, Guide
Tire size	9.5/65-15-6PR (OR) smooth tread
Overlap	83 mm (3.3")
SPRINKLER SYSTEM	
	Water-pressurized type Liquid-pressurized type
BALLAST	
Water ballast (available for sprinkler)	Approx. 185 kg (408 lbs)
FLUID CAPACITY	
Fuel tank	36 liters (9.5 gal)
Hydraulic oil tank	39 liters (10.3 gal)
Sprinkler tank	185 liters (49 gal)
WATER SPRINKLER SYSTEM	Pressurized type

* Specifications are subject to change without notice.

TOKYO JAPAN
TELEPHONE: TOKYO (03) 3431-9971
FACSIMILE: TOKYO (03) 3436-6212
Printed in Japan 2005 08. 1C ① ©

