

## SKID STEER LOADERS SPEC SHEET



### SPECIFICATIONS

	SR175	SV185	SR200
Rated operating capacity 50% (kg)	790	840	905
ROC with counterweights 50% (kg)	835	885	950
Tipping load (kg)	1588	1678	1814
Lift cylinder breakout force (kN)	21.3	12.2	27.3
Bucket cylinder breakout force (kN)	31.8	24.2	31.8
Boom geometry	Radial	Vertical	Radial

### ENGINE

Engine model	ISM	ISM	FPT F5C
Emission level	Tier 3	Tier 3	Tier 3
Displacement (l)	2.2	2.2	3.2
Horsepower (hp)	60	60	74
(@ rpm)	2900	2900	2500
Peak torque (Nm)	171	171	275
(@ rpm)	1800	1800	1400
Aspiration type	Turbo	Turbo	Turbo

### TRAVEL SPEED

Low range (km/h)	11.9	11.9	11.6
High range (optional) (km/h)	18.5	18.5	19.2

### HYDRAULIC SYSTEM

Pump flow (lpm)	72	72	85
Optional high flow (lpm)	108	108	116
Relief pressure (bar)	207	207	207


### WEIGHTS

Operating weight (kg)	2812	2950	3130
Shipping weight (kg)	2675	2810	2995

### SERVICE CAPACITY

Fuel tank (l)	75.5	75.5	75.5
---------------	------	------	------

## GENERAL DIMENSIONS

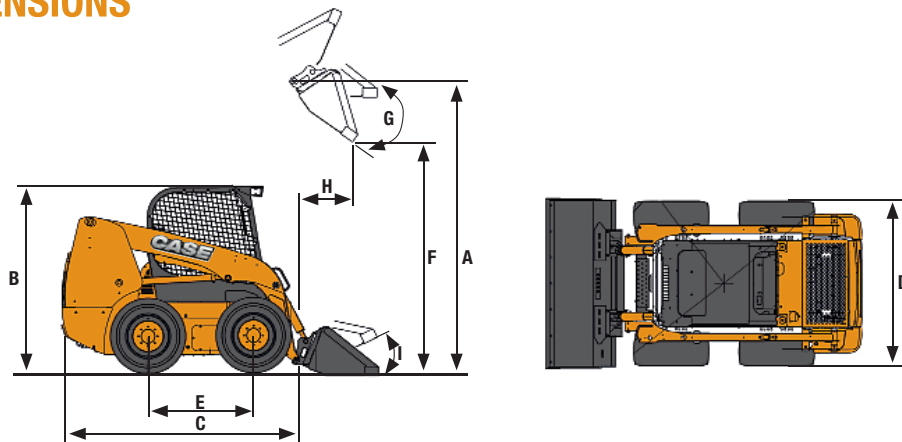

			SR175	SV185	SR200
A	Height to bucket hinge pin	mm	3099	3048	3124
B	Height to top of ROPS	mm	1974	1974	1998
C	Length without attachment	mm	2685	2710	2669
D	Overall width	mm	1678	1678	1755
E	Wheelbase	mm	1128	1128	1128
F	Dump height *	mm	2470	2377	2495
G	Dump angle	°	40	52	40
H	Dump reach @ max height	mm	542	783	517
I	Rollback angle (bucket on ground)	°	32	35	31

\* With D&F Bucket

## MANY ATTACHMENTS MEAN MANY BUSINESS OPPORTUNITIES




### BUCKETS

Tailor made bucket for a wide range of applications



### PLANERS

Wide offering of asphalt planers



### BROOM BUCKET

Efficient surfaces sweeping



### HAMMERS

For concrete demolition, Trenching and general excavation work



### AUGERS

For easy boring of holes in the ground

Check complete list of available attachments on the Parts & Service attachments catalogue