


	TR270	TR320	TV380
<b>PERFORMANCE SPECS</b>			
Rated Operating Capacity 50%	50%: 1225	50%: 1451	50%: 1723
ROC with counterweights 50%	50%: 1280	50%: 1676	50%: 1948
Rated Operating Capacity 35%	35%: 859	35%: 1018	35%: 1209
ROC with counterweights 35%	35%: 899	35%: 1203	35%: 1394
Tipping Load	2449 kg	2902 kg	3447 kg
Lift Cylinder Breakout Force*	27 kN	34.5 kN	26.8 kN
Bucket Cylinder Breakout Force*	3.3 kN	38.7 kN	33.4 kN
<b>ENGINE</b>			
Engine Brand	FPT	FPT	FPT
Displacement	3.2 l	3.2 l	3.2 l
Horsepower	74 hp @ 2500 rpm	90 hp @ 2500 rpm	90 hp @ 2500 rpm
Peak torque	275 Nm @ 1400 rpm	383 Nm @ 1400 rpm	383 Nm @ 1400 rpm
<b>TRAVEL SPEED</b>			
Low Range	8.2 km/h	8.2 km/h	8.2 km/h
High Range (Optional)	12.2 km/h	12.2 km/h	12.2 km/h
<b>HYDRAULIC SYSTEM</b>			
Pump flow	85 LPM	92 LPM	92 LPM
Optional high flow	116 LPM	131 LPM	131 LPM
Relief Pressure	210 bar	210 bar	210 bar
<b>WEIGHTS</b>			
Operating Weight	3750 kg	4355 kg	4625 kg
Shipping Weight	3615 kg	4200 kg	4475 kg
<b>SERVICE CAPACITY</b>			
Fuel Tank	75.5 l	96.5 l	96.5 l

\* Breakout forces estimated considering both tip and hydraulic limits.

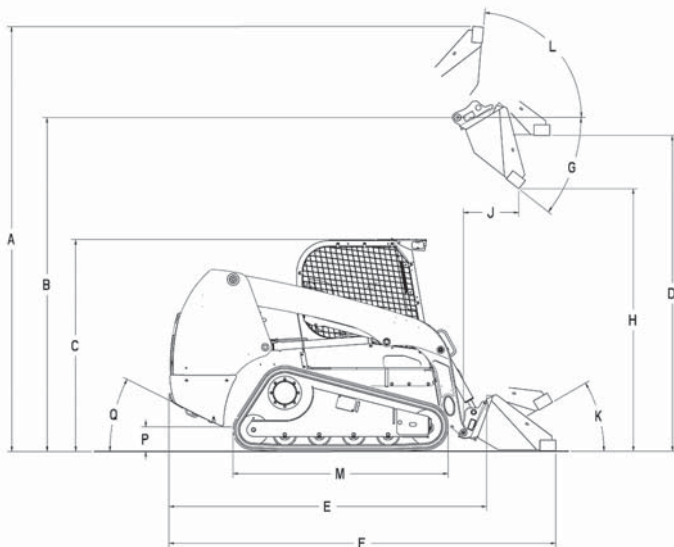

	TR270	TR320	TV380
A. Overall operating height	3.89 m	4.01 m	4.22 m
B. Height to bucket hinge pin	3.12 m	3.21 m	3.34 m
C. Height to top of ROPS	1.99 m	2.04 m	2.04 m
D. Bottom of bucket fully raised	NA	NA	NA
Overall length -			
E. without attachment	2.67 m	2.95 m	2.95 m
F. with bucket	NA	NA	NA
G. Dump angle	39.6°	38.3°	53.5°
H. Dump height with bucket	2.49 m	2.6 m	2.6 m
J. Dump reach @ max. height	0.57 m	0.54 m	0.79 m
Max. attachment rollback -			
K. at ground level	31°	29.7°	34°
L. at full height	98.6°	99.7°	86°
P. Ground clearance	0.20 m	0.24 m	0.24 m
Q. Angle of departure	32°	32°	32°
Overall width	1.68 m	1.93 m	1.93 m

**NOTE:** Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC

## Superior serviceability

Ask your technicians. Case has a reputation for easy-to-maintain and service equipment. The new Case CTLs are no exception, with features such as remote-mounted filters, ground-line access for daily maintenance checks and grouped service checkpoints.

