

ATTACHMENTS

NEED VERSATILITY?

Compatible with most allied loader attachments, articulated loaders from Mustang provide superior loader functionality while minimizing damage to ground surfaces. Perfect for landscape, agriculture, construction or rental – these machines are up for any challenge.



▲ Available accessories

608 708

	608	708
AUGERS - CHAIN DRIVE		
1650CL Auger Drive, Round - Complete	Std. Flow	Std. Flow
1650CLH Auger Drive, Hex - Complete	Std. Flow	Std. Flow
AUGERS - PLANETARY DRIVE		
PA210 Planetary Auger Drive, Round - Complete	Std. Flow	Std. Flow
PA210H Planetary Auger Drive Only with top link, Hex	Std. Flow	Std. Flow
AUGER - BITS		
SQ 9" (229 mm) Auger Bit - Round - 4 teeth - 2 9/16" (65 mm)	▲	▲
SQ 12" (305 mm) Auger Bit - Round - 4 teeth - 2 9/16" (65 mm)	▲	▲
SQ 18" (457 mm) Auger Bit - Round - 6 teeth - 2 9/16" (65 mm)	▲	▲
SQ 24" (610 mm) Auger Bit - Round - 9 teeth - 2 9/16" (65 mm)	▲	▲
SQ 9" (229 mm) Auger Bit - Hex - 4 teeth - 2" (51 mm)	▲	▲
SQ 12" (305 mm) Auger Bit - Hex - 4 teeth - 2" (51 mm)	▲	▲
SQ 18" (457 mm) Auger Bit - Hex - 6 teeth - 2" (51 mm)	▲	▲
SQ 24" (610 mm) Auger Bit - Hex - 9 teeth - 2" (51 mm)	▲	▲
TSQ 36" (914 mm) Tree & Shrub Auger Bit - Hex - 14 teeth - 2" (51 mm)	▲	▲
ANGLE BROOM		
72" (1828 mm) Angle Broom with Hydraulic Angle - Single Motor	Std. Flow	Std. Flow
84" (2134 mm) Angle Broom with Hydraulic Angle - Single Motor	Std. Flow	Std. Flow
BALE MOVERS		
Double Round Bale Spear - 42" (1067 mm), 3000 lb. (1361 kg) capacity	▲	▲
Square Bale Spear (3 tines) - 26" (660 mm), 3000 lb. (1361 kg) capacity	▲	▲
BS2400 - Hydraulic Bale Squeeze, Universal Mount	Std. Flow	Std. Flow
BUCKETS - SPECIALTY		
72" (1829 mm) Skeleton Rock Bucket - 23 tines	▲	▲
Slab Lifter Bucket	▲	▲
Stump Removal Bucket	▲	▲
BRUSH ROOT GRAPPLE		
66" (1676 mm) Brush Root Grapple, Standard Duty	Std. Flow	Std. Flow
72" (1829 mm) Brush Root Grapple, Standard Duty	Std. Flow	Std. Flow
HITCH ADAPTER		
Hitch Adapter	▲	▲
PALLET FORK GRAPPLE		
Pallet Fork Frame with Grapple	Std. Flow	Std. Flow
Standard Class II Tine 42" (1066 mm) (single tine)	▲	▲
STUMP GRINDER		
Stump Grinder, Hinged Self Feeding	Std. Flow	Std. Flow



GET ATTACHED

TIME IS PRICELESS ON THE JOBSITE, SO MUSTANG HAS MADE IT SIMPLE AND FAST TO HOOK UP A WIDE VARIETY OF ATTACHMENTS.



POWER-A-TACH®

The Power-A-Tach® hydraulic attachment mounting system is standard equipment and features a skid steer interface to utilize some of the attachments you already own.



A WIDE VARIETY OF EDGE ATTACHMENTS ARE AVAILABLE FROM YOUR MUSTANG DEALER.



○ STANDARD ● OPTIONAL

FEATURES	4-POST	CAB	4-POST	CAB
	608	708		
STRUCTURE				
4-Post Canopy - ROPS/FOPS Certified	○	○		
4-Post Canopy with Front and Rear Windows	●	●		
Cabin with Heat		●		●
Cabin with Heat and Air Conditioning		●		●
PERFORMANCE				
Power-A-Tach® Attachment Mounting System	○	○	○	○
Proportional Auxiliary Hydraulics with Case Drain and Circuit Pressure Dump	○	○	○	○
Tapered Z-bar Loader Linkage with Mechanical Self-Level and Return-to-Dig	○	○	○	○
Hydraglide™ Ride Control	●	●	●	●
Rear Auxiliary Hydraulics	●	●	●	●
Additional Set of Front Auxiliary Hydraulics	●	●	●	●
High-Flow Auxiliary Hydraulics	●	●	●	●
Hydrostatic 2-Speed Transmission	○	○	○	○
Tilt and Lift Arm Float Detent with Detent Disable	○	○	○	○
Oscillating Front Frame	○	○	○	○
Differential Lock (Hydraulically Activated Front and Rear)	○	○	○	○
Electric Attachment Control 14-Pin Harness with Switches	●	●	●	●
Articulation Locking Bar (conforms to SAEJ276)	○	○	○	○
3-Speed	608 7 / 12 / 19 mph (11 / 20 / 30 km/hr)		708 5 / 12 / 19 mph (8 / 20 / 30 km/hr)	
Inching Pedal	○	○	○	○
Rear Mount - Clevis	●	●	●	●
Rear Mount - Receiver	●	●	●	●
ENGINE				
Engine Block Heater	●	●	●	●
ELECTRICAL SYSTEM				
Lift / Tilt Electronic Lockout Switch	○	○	○	○
Master Electrical Disconnect Switch	○	○	○	○
Emergency Lift Arm Lower Switch	○	○	○	○
OPERATOR STATION				
Digital Display with Audible and Visual Indicators	○	○	○	○
Multi-Function Joystick	○	○	○	○
Steering Column with Tilt and Extension Adjustments	○	○	○	○
Cup Holder	○	○	○	○
Horn	○	○	○	○
Seven-Way Adjustable Mechanical Seat	○	○	○	○
Seven-Way Adjustable Air Suspension Seat	●	●	●	●
Seven-Way Adjustable Deluxe Cloth Air Suspension Seat		●		●
Adjustable Arm Rest	○	○	○	○
3-inch (75 mm) Seatbelt	●	●	●	●
Removable Rubber Floormat	○	○	○	○
12-Volt Socket in Arm Rest	○	○	○	○
Front and Rear 12-Volt Electric Auxiliary	●	●	●	●
Side View Mirrors	○	○	○	○
Lockable Tool Box	●	●	●	●
Radio	○	○	○	○
Back-up Alarm	●	●	●	●
Speed Control	●	●	●	●
Sound Reduction Package	●	●	●	●
Reverse and Brake Tail Lights	○	○	○	○
WORK LIGHTS				
Rotating Beacon	●	●	●	●
Strobe Light	○	○	○	○
LED Work Lights	○	○	○	○




	608 - Canopy	608 - Cab	708 - Canopy	708 - Cab	
DIMENSIONS	A. Length with Bucket on Ground (mm)	199.9" (5077)	199.9" (5077)	205.5" (5220)	205.5" (5220)
	B. Shipping Length (mm)	167.7" (4260)	167.7" (4260)	174.9" (4443)	174.9" (4443)
	C. Front Wheel Center to Pivot Pin (mm)	32.8" (833)	32.8" (833)	36.7" (931)	36.7" (931)
	D. Wheelbase (mm)	79" (2007)	79" (2007)	81.2" (2063)	81.2" (2063)
	E. Rear Overhang (mm)	52.2" (1326)	52.2" (1326)	52.1" (1323)	52.1" (1323)
	F. Height to Top of Cab (mm)	97.1" (2467)	97.1" (2467)	97.5" (2476)	97.5" (2476)
	H. Hood Height (mm)	69.9" (1775)	69.9" (1775)	69.6" (1768)	69.6" (1768)
	J. Maximum Operating Height (mm)	157.8" (4008)	157.8" (4008)	163.8" (4160)	163.8" (4160)
	K. Bucket Hinge Pin Height (mm)	130.5" (3315)	130.5" (3315)	136.8" (3474)	136.8" (3474)
	L. Ground Plane to Bucket Edge Height (mm)	123" (3125)	123" (3125)	129" (3280)	129" (3280)
	M. Dump Clearance at Full Height (mm)	99" (2515)	99" (2515)	106.7" (2710)	106.7" (2710)
	N. Dump Reach at Full Height (mm)	20.9" (529)	20.9" (529)	22.4" (569)	22.4" (569)
	P. Width over Tires - Narrow / Wide (mm)	64.7" / 79.4" (1645 / 2017)	64.7" / 79.4" (1645 / 2017)	68.4" / 77.1" (1736 / 1957)	68.4" / 77.1" (1736 / 1957)
	Q. Tire Gauge	48.4" / 62.8" (1230 / 1595)	48.4" / 62.8" (1230 / 1595)	52.4" / 60.8" (1327 / 1544)	52.4" / 60.8" (1327 / 1544)
	R. ROPS Width (mm)	53.9" (1370)	53.9" (1370)	57.1" (1451)	57.1" (1451)
	S. Ground Clearance (mm)	14.6" (370)	14.6" (370)	12.3" (313)	12.3" (313)
	T. Turning Radius with Bucket (mm)	143.2" (3637)	143.2" (3637)	155.3" (4159)	155.3" (4159)
	U. Outer Turning Radius (mm)	130.3" (3310)	130.3" (3310)	134.2" (3409)	134.2" (3409)
	V. Inner Turning Radius (mm)	62.1" (1577)	62.1" (1577)	63.8" (1620)	63.8" (1620)
	W. Articulation Angle from Center (mm)	45°	45°	45°	45°
	X. Rollback at Height	45°	45°	45°	45°
	Y. Maximum Dump Angle at Full Height	45°	45°	45°	45°
Z. Bucket Rollback at Ground	45°	45°	45°	45°	
AA. Attachment Pivot Clearance (mm)	7.5" (190)	7.5" (190)	7.5" (190)	7.5" (190)	
BB. Wheel Radius (mm)	19.5" (495)	19.5" (495)	19.5" (495)	19.5" (495)	
CC. Bucket Width - standard (mm)	66" (1676)	66" (1676)	84" (2134)	84" (2134)	
ENGINE	Engine Manufacturer	Yanmar	Yanmar	Deutz	Deutz
	Model / Number of Cylinders	4TNV98CT / 4	4TNV98CT / 4	TD 3.6 L4 / 4	TD 3.6 L4 / 4
	Displacement (L)	0.87 gal. (3.3 L)	0.87 gal. (3.3 L)	0.95 gal (3.6 L)	0.95 gal (3.6 L)
Power (kW) @ 2300 rpm ¹	64.4 hp (48)	64.4 hp (48)	74.3 hp (55)	74.3 hp (55)	
LOAD CAPACITIES	Static Tipping Load with Bucket				
	Straight (kg)	6,409 lbs. (2907)	6,743 lbs. (3059)	7,446 lbs. (3378)	7,907 lbs. (3587)
	Full Turn (kg)	4,917 lbs. (2230)	5,244 lbs. (2379)	5,778 lbs. (2621)	6,126 lbs. (2779)
	Static Tipping Load with Pallet Forks				
	Straight (kg)	4,980 lbs. (2259)	5,302 lbs. (2405)	6,044 lbs. (2741)	6,354 lbs. (2882)
	Full Turn (kg)	3,921 lbs. (1778)	4,157 lbs. (1885)	4,793 lbs. (2174)	5,006 lbs. (2271)
Bucket Breakout (kg)	12,661 lbf (5743)	12,661 lbf (5743)	13,020 lbf (5906)	13,020 lbf (5906)	
Operating Weight (kg)	9,150 lbs. (4150)	9,500 lbs. (4309)	10,540 lbs. (4781)	10,920 lbs. (4953)	
HYDRAULICS	Work Hydraulic System Flow (L/min) STD	18.4 gpm (69.5)	18.4 gpm (69.5)	18.4 gpm (69.5)	18.4 gpm (69.5)
	High-Flow Auxiliary Hydraulics - optional (L/min)	25.6 gpm (96.9)	25.6 gpm (96.9)	30.2 gpm (114.3)	30.2 gpm (114.3)
	Work Hydraulic System Pressure (bar)	2,900 psi (200)	2,900 psi (200)	2,900 psi (200)	2,900 psi (200)
	Drive Hydraulic System Pressure (bar)	6,092 psi (420)	6,092 psi (420)	5,511 psi (380)	5,511 psi (380)
	Drive Hydraulic Reservoir Capacity (L)	19.5 gal. (73.8)	19.5 gal. (73.8)	19.5 gal. (73.8)	19.5 gal. (73.8)
OTHER	Battery	12-volt	12-volt	12-volt	12-volt
	Fuel Tank Capacity (L)	25 gal. (95)	25 gal. (95)	27 gal. (102)	27 gal. (102)
	Maximum Travel Speed (km/hr)	7/12/19 mph (11/20/30)	7/12/19 mph (11/20/30)	5/12/19 mph (8/20/30)	5/12/19 mph (8/20/30)
	Tire Size - Standard	405 / 70-20	405 / 70-20	405 / 70-20	405 / 70-20

¹ Per ISO 14396

Mustang reserves the right to make changes in specifications at any time without notice or obligation.

REFERENCE DIAGRAMS

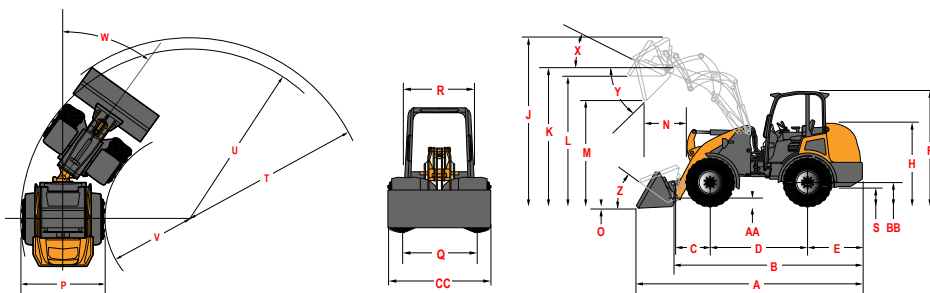

For more information on Mustang equipment, visit our website:

Mustangmfg.com

TIRE OPTIONS

HIGH FLOTATION



Agricultural Tires

NON-DIRECTIONAL SELF-CLEANING



On / Off Road / Industrial Tires

AG/INDUSTRIAL HYBRID UNIVERSAL



On / Off Road Tires

Mustang reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly.

Mustang reserves the right to add improvements or make changes in features and specifications at any time without notice or obligation.



Mustang Mfg.



MustangEquipment



West Bend, WI 53095 U.S.A. | Tel: 262-334-9461 | Fax: 262-338-7517