


Technical specifications:

MODEL	UNIT	80 HP	
		SD08YE	SD08YS
Main Specification	L*W*H	mm	Traction frame 4252 × 2680 × 2775 Winch 4882 × 3150 × 2775
	Operating Weight	kg	8020
	Track Gauge	mm	1600
	Ground Length	mm	2270
	Width of Trackshoe	mm	460
	Blade Width	mm	2680
	Blade Height	mm	950
	Dozing Capacity	m ³	1.93
	Maximum Lifting Height of Blade	mm	750
	Maximum Digging Depth of Blade	mm	515
	Maximum Tilting Height of Blade	mm	350
	Cutting Angle	°	52-58
	Blade Weight	kg	1211.7
	Speed (forward/reverse)	km/h	0-9
	Ground Pressure	kPa	38.3
	Minimum Ground Clearance	mm	320
	Gradeability	°	30
Engine	Model		Cummins QSB3.3
	Type		Turbo charged, Water cooled 4-stroke/cycle diesel engine; direct injection; with crank case shield or equivalent
	Rated Speed	rpm	2200
	Rated Power	kW	59
	Cylinder Qty-Cylinder Bore X Stroke	mm	4-95 × 115
	Swept Volume	L	3.3
	Max.Torque	N.m/rpm	415/1600
	Fuel Capacity	L	192
	Coolant Capacity	L	18
	Net Engine Weight	kg	275
Undercarriage System	Type		Rigid Suspension
	Number of Carrier Roller		2/side
	Width of Trackshoe	mm	460
	Pitch	mm	154
Hydraulic System	Variable Pump		2
	Number of Travel Motor and Reducer		2
	System Pressure	MPa	40
	Brake Pressure	MPa	2.5

Dimensions (80HP)

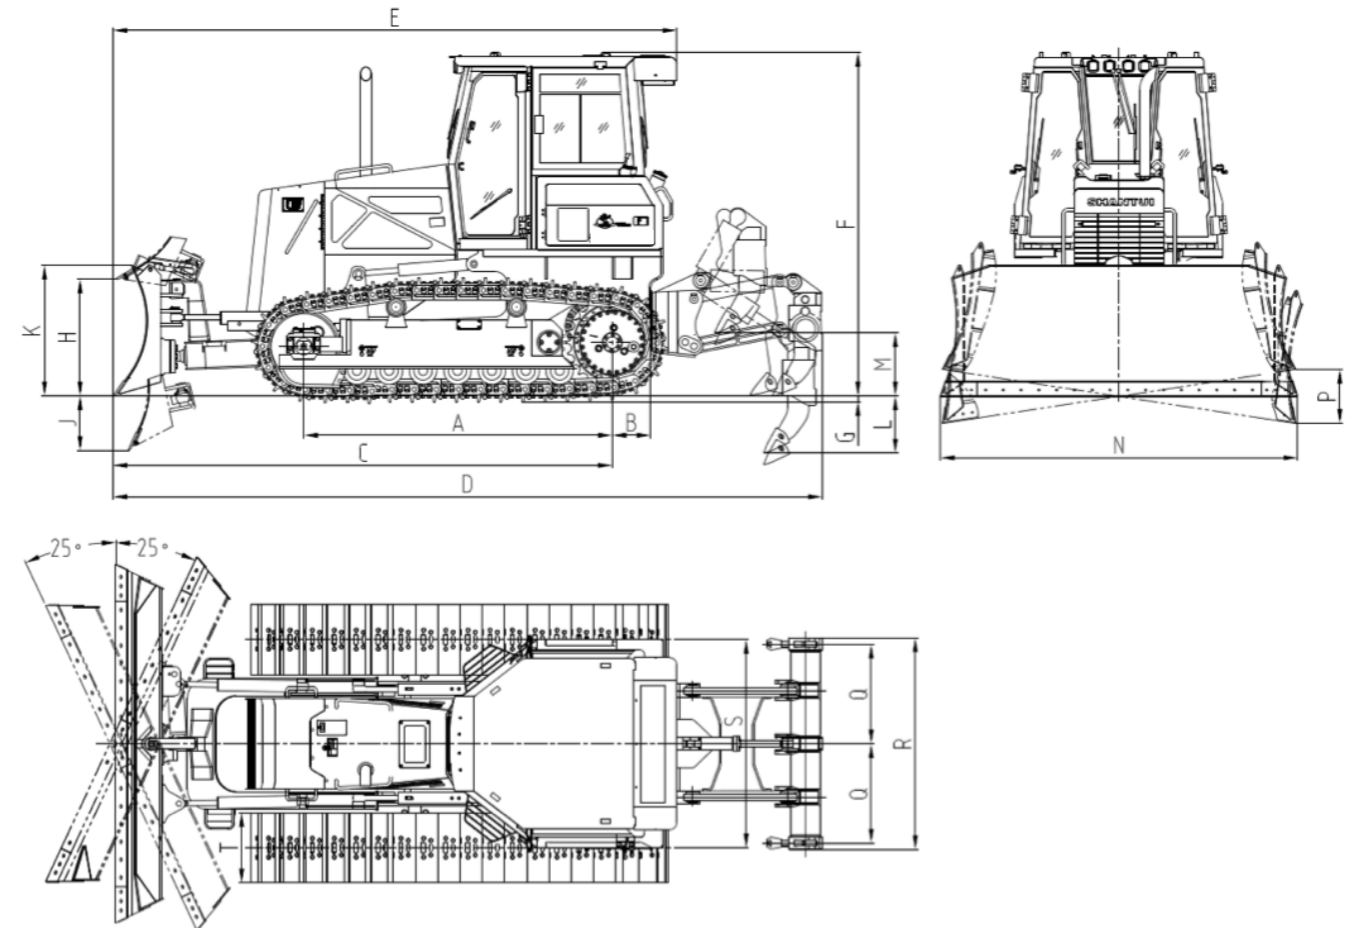

		80HP	
		SD08YE	SD08YS
A	mm	2270	2270
B	mm	430	430
C	mm	3737	3737
D	mm	4882	4882
H	mm	750	750
J	mm	515	515
K	mm	950	900
F	mm	2775	2775
R	mm	1780	1780
N	mm	2680	3150

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR AND APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.