

SR-250R
PREMIUM
Roughter



SL-700R
PREMIUM
Roughter



Including optional items.

<http://www.kato-works.co.jp>

NOTE : Illustrations may include optional equipment. KATO products and specifications are subject to improvements and changes without notice.



KATO
QUALITY & EXPERIENCE
SINCE 1895

KATO WORKS CO.,LTD.

9-37, Higashi-ohi 1-chome, Shinagawa-ku, Tokyo 140-0011 Japan.
Tel. : Head Office Tokyo(03)3458-1111
Overseas Marketing Department Tokyo(03)3458-1115
Fax. : Tokyo(03)3458-1163

C03341
12.2012-1000(AT)1 Printed in Japan

SR-250R
PREMIUM
Roughter



SL-700R
PREMIUM
Roughter



KATO

Including optional items.

SR-250R
PREMIUM
Roughter

EJIB

More Speedy, easier & safer!!

Hello to easier and safer jib-setting!
 “E-jib” system proposes you new setting style.

- Maximum Lifting Capacity 25 ton × 3.5 m
- Boom Length 9.35 m – 30.5 m (4 section)
- Boom Derricking Angle 0° – 83°
- Jib Length 8.7 m – 13.1 m (2 section)
- Jib Off-set Angle 5° – 60°
- Maximum Lifting Height 31.2 m (Boom) / 44.8 m (Jib)



● Joint the Tension Rod

● Release the jib

● Set the auxiliary hook

Manual Control

Automatical Control

Manual Control

Including optional items.

SL-700R

PREMIUM

Rougher



Reach, reach, reach!!

Built-in cylinder in “SL-Jib” carries smooth & speedy works, powerful derricking and telescoping take you to the sky!!

- Maximum Lifting Capacity 70 ton × 2.5 m
- Boom Length 10.0 m – 44.5 m (6 section)
- Boom Derricking Angle 0° – 84°
- Jib Length 8.3 m – 17.5 m (3 section)
- Jib Off-set Angle 7° – 60°
- Maximum Lifting Height 45.5 m (Boom) / 62.7 m (Jib)

Including optional items.

Standard & Optional Equipments



▲ Anemometer




▲ Tool Box



▲ Cabin



▼ Outrigger

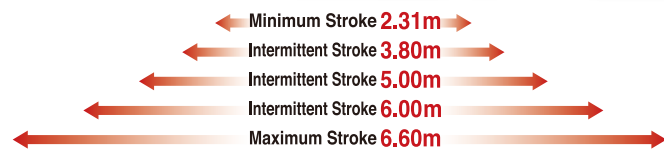

▲ ACS Moment limiter



▲ Monitoring Systems for Rear, Right & Left side view



▲ Winch Drum Monitoring System



▲ ACS Moment limiter




▲ Searchlight



▲ Cabin



▼ Outrigger

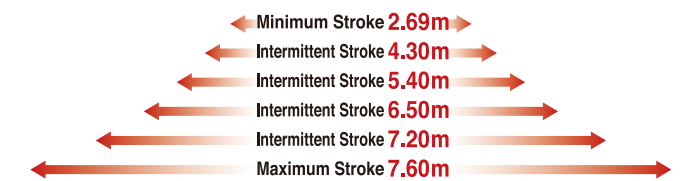

▲ ACS Signal



Including optional items.