

H 11i


Compactor with smooth drum
Compactors Series H / Series H235



HIGHLIGHTS H

- > 3-point articulation for outstanding traction and off-road mobility
- > Operating concept Easy Drive
- > Electronic machine management Hammtronic
- > Excellent view of the machine and the construction site
- > High compaction performance thanks to high line load and big amplitudes

Machine dimensions		
Total length (L)	mm	5850
Width (B)	mm	2284
Total height (H)	mm	2960
Drum width (X)	mm	2140
Height loading, min. (Hl)	mm	2308

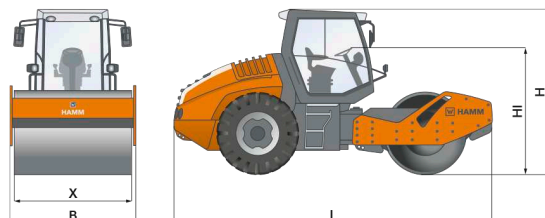

TIER 4
EU Stage IV
/ EPA Tier 4

TECHNICAL DATA		Unit	H 11i
	Weights		
	Operating weight with cab	kg	10880
	Operating weight with ROPS	kg	10630
	Operating weight, max.	kg	13290
	Axle load, front/rear	kg	5890/4990
	Static linear load, front	kg/cm	27,5
	French classific., data/class		40,4/VM2
	Machine dimensions		
	Total length	mm	5850
	Total height with cab	mm	2960
	Height loading, min.	mm	2308
	Wheel base	mm	3150
	Total width with cab	mm	2284
	Ground clearance, centre	mm	390
	Turning radius, inside	mm	3870
	Angle of driving slope, front/rear	°	53/32
	Drum dimensions		
	Drum width, front	mm	2140
	Drum diameter, front	mm	1504
	Drum thickness, front	mm	25
	Drum type, front		smooth
	Wheel dimensions		
	Size of tyres, rear		AW 23.1-26 12 PR
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 3.6 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		85,0/115,6/2300
	Power rating SAE J1349, kW/HP/rpm		85,0/113,9/2300
	Emission standard		EU Stage IV / EPA Tier 4
	Exhaust gas after-treatment		DOC-SCR
	Drive		
	Speed, infinitely variable	km/h	0-12,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	54/59
	Vibration		
	Vibration frequency, front, I/II	Hz	30/36
	Amplitude, front, I/II	mm	2,04/0,84
	Centrifugal force, front, I/II	kN	246/136
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	280
	AdBlue/DEF tank, content	L	32
	Sound level		
	Acoustic power LW(A), sticker		104
	Acoustic power LW(A), measured		101

EQUIPMENT

2 large working and rear view mirrors, 2 multiply-adjustable armrests, 3-point articulation, Storage bin, lockable, Dashboard with displays, indicator lights and function key, Automatic traction control and anti-slip control, Operating concept Easy Drive, ECO mode, Speed preselect, Cup holder, Hammtronic - electronic machine management, Hose protection on front vehicle, Vibration-isolated operator's platform, Space for cold box, Stepless hydrostatic all-wheel drive, Automatic vibration system, ROPS, rigid

OPTIONAL EQUIPMENT

HCQ Navigator, Rotating seat adapter, Steering column with comfort exit and tiltable dashboard, Combination scraper for smooth drum and padfoot shells, Rotating beacon, Protective roof, Padfoot shells, Auxiliary heater, Working lights, Back-up alarm (reversing), Frequency control, Radio, ROPS cabin with heating, FOPS-approved (level I), ROPS cabin with heating and air conditioning, FOPS-approved (level I), Safety belt monitoring device, Automatic engine-off function, Bonnet with electrical easy access engine cover release, Telematics interface, WIFMS fleet management interface

HAMM AG

Hammstraße 1
D-95643 Tirschenreuth
Tel +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu



HAMM